
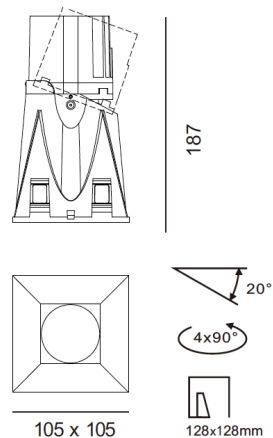


HORA LED

PLASTER IN RECESSED ADJ. DOWNLIGHT
DLD/1160618IH

DLD CONTRACT

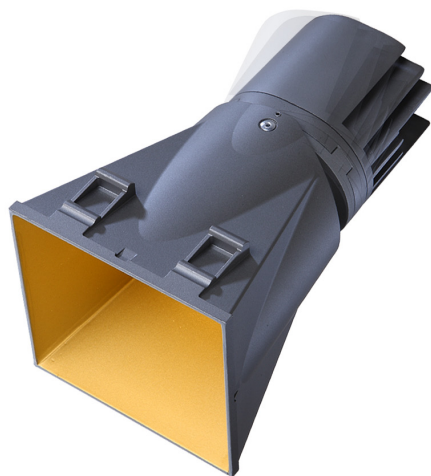


Dimensions
105x105mm, H.187mm

Cutout
128x128mm



- IP244
- 220V
- Beam angle: 14°, 24° & 35°
- 128x128mm cutout
- Plaster in fitting
- Rotation: 4x 90°
- 55° glare cut
- 0.95kg weight
- Driver included



Gold Baffle



Black Baffle



White Baffle

HORA LED

PLASTER IN RECESSED ADJ. DOWNLIGHT
DLD/1160618IH



OVERVIEW

Power	Beam	Flux	CCT	Non-DIM	1-10V DIM	Triac DIM
13W	14°	755lm	2700K	Y	Y	Y
13W	14°	770lm	3000K	Y	Y	Y
13W	14°	813lm	4000K	Y	Y	Y
13W	25°	704lm	2700K	Y	Y	Y
13W	25°	709lm	3000K	Y	Y	Y
13W	25°	778lm	4000K	Y	Y	Y
13W	36°	609lm	2700K	Y	Y	Y
13W	36°	649lm	3000K	Y	Y	Y
13W	36°	678lm	4000K	Y	Y	Y

HORA LED


PLASTER IN RECESSED ADJ. DOWNLIGHT
DLD/1160618IH



LIGHTING DATA - 13W

LED COB 14°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	60lm/W	60lm/W	64lm/W

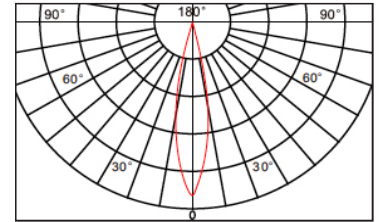

13W 2700K - Flux 757lm

Lux	h(m)	d(cm)	Em	Emax
	1	24	4702	7510
	2	49	1175	1820
	3	73	522	834

13W 3000K - Flux 770lm


Lux	h(m)	d(cm)	Em	Emax
	1	23	4949	7750
	2	46	1237	2020
	3	69	549	861

13W 4000K - Flux 813lm

Lux	h(m)	d(cm)	Em	Emax
	1	23	5100	8950
	2	47	1275	2240
	3	71	566	994

LED COB 24°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	35V DC	35V DC	35V DC
Output I	350mA	350mA	350mA
Efficacy	55lm/W	55lm/W	60lm/W

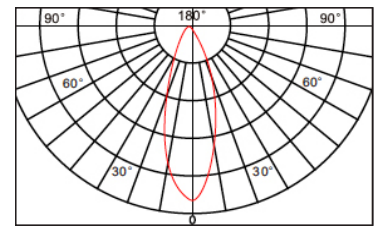

13W 2700K - Flux 704lm

Lux	h(m)	d(cm)	Em	Emax
	1	42	1776	2550
	2	85	444	671
	3	128	197	283

13W 3000K - Flux 709lm


Lux	h(m)	d(cm)	Em	Emax
	1	42	1826	2740
	2	84	456	744
	3	126	202	304

13W 4000K - Flux 778lm

Lux	h(m)	d(cm)	Em	Emax
	1	41	2017	3180
	2	82	504	820
	3	124	224	353

LED COB 35°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	35V DC	35V DC	35V DC
Output I	350mA	350mA	350mA
Efficacy	47lm/W	50lm/W	52lm/W

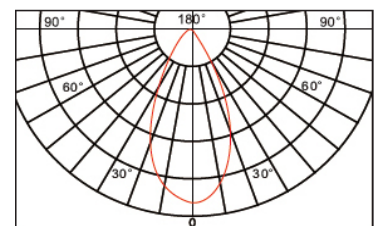

13W 2700K - Flux 609lm

Lux	h(m)	d(cm)	Em	Emax
	1	64	839	1310
	2	128	209	345
	3	192	93	145

13W 3000K - Flux 649lm

Lux	h(m)	d(cm)	Em	Emax
	1	64	902	1430
	2	128	225	377
	3	192	100	158

13W 4000K - Flux 678lm

Lux	h(m)	d(cm)	Em	Emax
	1	64	944	1630
	2	128	236	436
	3	192	104	181

HORA LED
PLASTER IN RECESSED ADJ. DOWNLIGHT
DLD/1160618IH

DLD
CONTRACT



HORA LED

PLASTER IN RECESSED ADJ. DOWNLIGHT
DLD/1160618IH

DLD
CONTRACT

PRODUCT CODE CONSTRUCTION

HORA LED PLASTER IN RECESSED ADJUSTABLE DOWNLIGHT

DLD/1160618IH / [X] / [X] / [X] / [X] / [X]

CONTROL:

[NON]

[1/10V]

[TRI]

NON-DIMMABLE 1-10V DIMMABLE TRIAC DIMMABLE

LIGHT COLOUR TEMPERATURE (CCT):

[27K]

[30K]

[40K]

2700°K

3000°K

4000°K

BEAM ANGLE:

[14D]

[24D]

[35D]

14°

24°

35°

WATTAGE:

[13W]

13W

REFLECTOR FINISH:

[WH]

[BK]

[SI]

[GD]

White

Black

Silver

Gold



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Nurseries
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH