


JUNO LED
RECESSED ADJUSTABLE DOWNLIGHT
DLD/2264018FI

DLD
CONTRACT

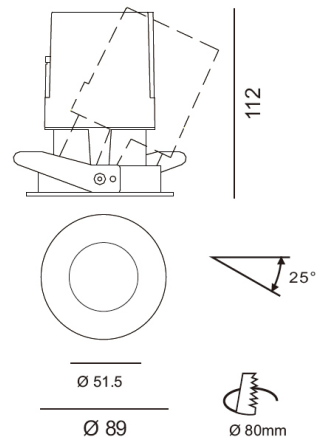

Dimensions
Ø89mm, H.112mm

Cutout
Ø80mm



- IP20
- 220V
- Beam angle of 14°, 24° & 35°
- Ø80mm round cutout
- 25° adjustable tilt
- 30° glare cut
- 0.38kg weight
- Driver included

OVERVIEW

Power	Beam	Flux	CCT	Non-DIM	1-10V DIM	Triac DIM
13W	14°	757lm	2700K	Y	Y	Y
13W	14°	770lm	3000K	Y	Y	Y
13W	14°	813lm	4000K	Y	Y	Y
13W	24°	704lm	2700K	Y	Y	Y
13W	24°	709lm	3000K	Y	Y	Y
13W	24°	778lm	4000K	Y	Y	Y
13W	35°	609lm	2700K	Y	Y	Y
13W	35°	649lm	3000K	Y	Y	Y
13W	35°	678lm	4000K	Y	Y	Y

JUNO LED


RECESSED ADJUSTABLE DOWNLIGHT
DLD/2264018FI



LIGHTING DATA - 13W

LED COB 14°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	60lm/W	60lm/W	64lm/W

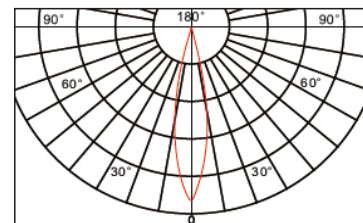

13W 2700K - Flux 757lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	24	4702	7510
	2	49	1175	1820
	3	73	522	834

13W 3000K - Flux 770lm


Lux	h(m)	d(cm)	Em	E _{max}
	1	23	4949	7750
	2	46	1237	2020
	3	69	549	861

13W 4000K - Flux 813lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	23	5100	8950
	2	47	1275	2240
	3	71	566	994

LED COB 24°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	55lm/W	55lm/W	60lm/W

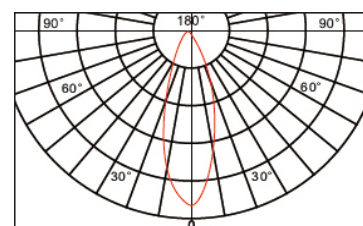

13W 2700K - Flux 704lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	42	1776	2550
	2	85	444	671
	3	128	197	283

13W 3000K - Flux 709lm


Lux	h(m)	d(cm)	Em	E _{max}
	1	42	1826	2740
	2	84	456	744
	3	126	202	304

13W 4000K - Flux 778lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	41	2017	3180
	2	82	504	820
	3	124	224	353

LED COB 35°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	47lm/W	50lm/W	52lm/W

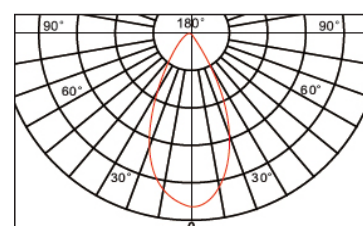

13W 2700K - Flux 609lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	64	839	1310
	2	128	209	345
	3	192	93	145

13W 3000K - Flux 649lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	64	902	1430
	2	128	225	377
	3	192	100	158

13W 4000K - Flux 678lm

Lux	h(m)	d(cm)	Em	E _{max}
	1	64	944	1630
	2	128	236	436
	3	192	104	181

JUNO LED
RECESSED ADJUSTABLE DOWNLIGHT
DLD/2264018FI

DLD
CONTRACT



JUNO LED

RECESSED ADJUSTABLE DOWNLIGHT
DLD/2264018FI

DLD
CONTRACT

PRODUCT CODE CONSTRUCTION

JUNO LED RECESSED ADJUSTABLE DOWNLIGHT

DLD/2264018FI / [X] / [X] / [X] / [X] / [X]

CONTROL:

[NON]

[1/10V]

[TRI]

NON-DIMMABLE 1-10V DIMMABLE TRIAC DIMMABLE

LIGHT COLOUR TEMPERATURE (CCT):

[27K]

[30K]

[40K]

2700°K

3000°K

4000°K

BEAM ANGLE:

[14D]

[24D]

[35D]

14°

24°

35°

WATTAGE:

[13W]

13W

BEZEL FINISH:

[WH]

White



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Nurseries
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH