


## JUNO LED

PIN HOLE RECESSED DOWNLIGHT  
DLD/P-2264318FI

# DLD

**CONTRACT**

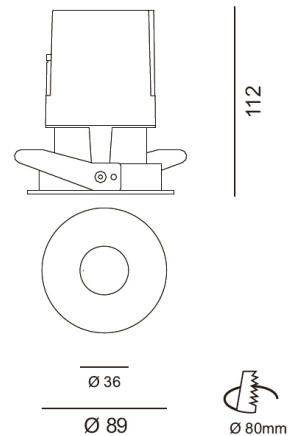

### Dimensions

Ø89mm, H.112mm

### Cutout

Ø80mm



- IP20
- 220V
- Beam angle of 14°, 24° & 35°
- Ø80mm round cutout
- Ø36mm pin hole aperture
- 35° glare cut
- 0.38kg weight
- Driver included

## JUNO LED

PIN HOLE RECESSED DOWNLIGHT  
DLD/P-2264318FI



### OVERVIEW

Power	Beam	Flux	CCT	Non-DIM	1-10V DIM	Triac DIM
13W	14°	456lm	2700K	Y	Y	Y
13W	14°	460lm	3000K	Y	Y	Y
13W	14°	504lm	4000K	Y	Y	Y
13W	24°	424lm	2700K	Y	Y	Y
13W	24°	467lm	3000K	Y	Y	Y
13W	24°	476lm	4000K	Y	Y	Y
13W	35°	389lm	2700K	Y	Y	Y
13W	35°	417lm	3000K	Y	Y	Y
13W	35°	446lm	4000K	Y	Y	Y

# JUNO LED


PIN HOLE RECESSED DOWNLIGHT  
DLD/P-2264318FI



## LIGHTING DATA - 13W

### LED COB 14°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	35lm/W	35lm/W	37lm/W

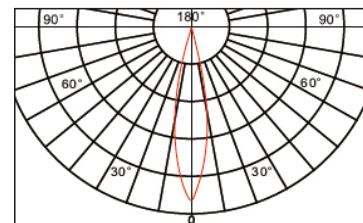

#### 13W 2700K - Flux 456lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	28	1999	3280
	2	56	499	808
	3	84	222	364

#### 13W 3000K - Flux 460lm


Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	27	2102	3730
	2	55	525	930
	3	82	233	414

#### 13W 4000K - Flux 504lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	28	2238	4080
	2	57	559	998
	3	85	248	453

### LED COB 24°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	35lm/W	35lm/W	36lm/W

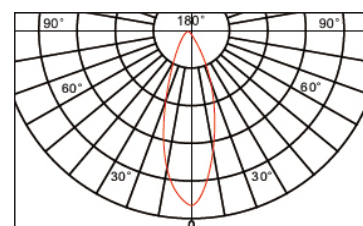

#### 13W 2700K - Flux 424lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	47	931	1640
	2	94	232	398
	3	141	103	182

#### 13W 3000K - Flux 467lm


Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	47	1000	1750
	2	94	250	450
	3	141	111	194

#### 13W 4000K - Flux 476lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	49	1025	1930
	2	98	256	493
	3	148	113	214

### LED COB 35°

Power	13W	13W	13W
CCT	2700K	3000K	4000K
CRI	>80	>80	>80
Output V	32V DC	32V DC	32V DC
Output I	350mA	350mA	350mA
Efficacy	31lm/W	31lm/W	33lm/W

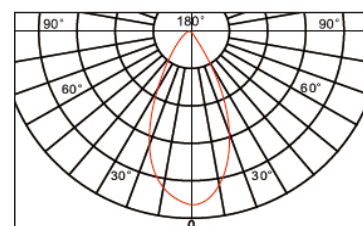

#### 13W 2700K - Flux 398lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	67	533	856
	2	134	133	224
	3	201	59	95

#### 13W 3000K - Flux 417lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	68	563	910
	2	137	140	236
	3	205	62	101


#### 13W 4000K - Flux 446lm

Lux	h(m)	d(cm)	Em	E <sub>max</sub>
	1	69	586	1040
	2	138	146	272
	3	207	65	115

# JUNO LED

PIN HOLE RECESSED DOWNLIGHT  
DLD/P-2264318FI

**DLD**  
**CONTRACT**



## JUNO LED

PIN HOLE RECESSED DOWNLIGHT  
DLD/P-2264318FI

**DLD**  
**CONTRACT**

### PRODUCT CODE CONSTRUCTION

JUNO LED PIN HOLE RECESSED DOWNLIGHT

DLD/P-2264318FI / [X] / [X] / [X] / [X] / [X]

CONTROL:

[NON]

[1/10V]

[TRI]

NON-DIMMABLE 1-10V DIMMABLE TRIAC DIMMABLE

LIGHT COLOUR TEMPERATURE (CCT):

[27K]

[30K]

[40K]

2700°K

3000°K

4000°K

BEAM ANGLE:

[14D]

[24D]

[35D]

14°

24°

35°

WATTAGE:

[13W]

13W

BEZEL FINISH:

[WH]

White



01189 889414



enquiries@dld-contract.co.uk



dld-contract.co.uk

DLD Contract Ltd  
Unit 9 Brookside Nurseries  
Church Road  
Swallowfield  
Reading  
Berkshire  
RG7 1TH